

10/505319

PATENT
450110-05269

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

DT09 Rec'd PCT/PTO 20 AUG 2004

Applicants: Keith Robert CALDER et al.
Intn'l. Appln. No.: PCT/GB03/00558
Intn'l Filing Date: February 7, 2003
For: IMAGE PROCESSING APPARATUS AND METHOD

745 Fifth Avenue
New York, NY 10151

EXPRESS MAIL

Mailing Label Number: EV385417504US

Date of Deposit: August 20, 2004

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" Service under 37 CFR 1.10 on the date indicated above and is addressed to Mail Stop PCT, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Charles Jackson
(Typed or printed name of person mailing paper or fee)

Charles Jackson
(Signature of person mailing paper or fee)

CLAIM OF PRIORITY UNDER 37 C.F.R. § 1.78(a)(2)

Mail Stop PCT
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Pursuant to 35 U.S.C. 119, this application is entitled to a claim of priority to United Kingdom Application No. 0204237.2 filed 22 February 2002.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicants

By: William S. Frommer
William S. Frommer
Reg. No. 25,506
Tel. (212) 588-0800

BEST AVAILABLE COPY

00210353



PCT/GB 2003 / 000558
Rec'd PCT 20 AUG 2004



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 28 MAR 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 28 February 2003

BEST AVAILABLE COPY

An Executive Agency of the Department of Trade and Industry

Patents Form 1/77

Patents Act 1977
(Rule 16)



25 FEB 02 E698386-1 D02246
P01/7700-0:00-0204237.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P013132GB

2. Patent application number

(The Patent Office will fill in this part)

0204237.2

22 FEB 2002

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

SONY UNITED KINGDOM LIMITED
THE HEIGHTS
BROOKLANDS
WEYBRIDGE
SURREY, KT13 0XW

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

652270000 1

4. Title of the invention

IMAGE PROCESSING APPARATUS AND METHOD

5. Name of your agent (*if you have one*)

D Young & Co

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

21 New Fetter Lane
London
EC4A 1DA

Patents ADP number (*if you know it*)

59006

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form 0

Description 11 ✓

Claim(s) 5 ✓

Abstract 1 ✓

Drawing(s) 5 45 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 4 ✓

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77) 0

Any other documents 0
(please specify)

11. I/We request the grant of a patent on the basis of this application.
Signature *D Young & Co* Date 22 February 2002
D Young & Co (Agents for the Applicants)

12. Name and daytime telephone number of person to contact in the United Kingdom Dr Jonathan DeVile 023 8071 9500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

IMAGE PROCESSING APPARATUS AND METHOD

Field of the Invention

The present invention relates to colour processors operable to process input pixels representing a colour image to form groups of output colour component signal samples, wherein the number of samples representing the image is preferably reduced.

The present invention also relates to image processing apparatus operable to reproduce pixels representative of a colour image from groups of colour component signal samples, each group representing a pair of pixels having two luminance and first and second chrominance samples.

10 Background of the Invention

It is known in the technical field of colour image processing to convert the red, green and blue (RGB) colour component signal samples of pixels representing an image into groups of component signal samples each having a luminance (Y) and two chrominance samples (U, V). Representing the RGB pixels as YUV signal samples provides a facility for reducing an amount of information, which must be communicated to represent a colour image. The reduction can be arranged by reducing or discarding some of the chrominance information without or with a reduced likelihood of causing a noticeable degradation to the reproduced image. This is because the human eye is less sensitive to loss of chrominance (colour) information from an image than luminance information.

The human eye's reduced sensitivity to loss of chrominance information can be used to reduce an amount of information, which is required to store a colour image. For example, it is known to reduce a number of samples required to store a digital colour image by converting pixels having RGB components into YUV form, discarding the UV chrominance values for every other pixel and storing the luminance value Y and storing the other chrominance values. The format of the resulting stored colour image is known as 4:2:2. When the colour image is reproduced, the UV chrominance values which have been discarded are reproduced from the UV chrominance values which have been stored.

For some applications, such as for hand held personal digital assistants or mobile radiotelephones having display devices, a reduction in an amount of information required to represent an image is particularly advantageous. Reducing the amount of information required to represent the image can provide an advantage, for example, with respect to the cost of the device as a result of a reduction in the size of a memory for storing the image. However, as far as possible, such a reduction in the amount of information required to represent an image should not affect the quality of the reproduced image.

Summary of the Invention

10 According to the present invention there is provided a colour processor operable to process input pixels, each comprising three colour component signal samples, to produce output colour component signal samples. The colour processor is operable to receive first and second input pixels and to generate from each pixel a luminance value from the corresponding three colour component samples of each pixel
15 respectively. The colour processor forms first and second output chrominance values for each of the first and second input pixels. The output chrominance values are formed by calculating from each of the colour components of each input pixel first and second chrominance values, and averaging the values of the first chrominance value of the first and second input pixels and averaging the second chrominance values of the
20 first and second input pixels. The first and second output chrominance values are produced from the averaged first and second chrominance values respectively. The output colour component signal samples are formed for the first and second input pixels from the luminance value for each pixel and the first and second output chrominance values.

25 Embodiments of the present invention provide a colour processor, which is arranged to reduce a number of signal samples, which are required to represent a colour image. The reduction is provided by representing a pair of pixels as two luminance value signal samples (Y1, Y2) and first and second chrominance values (UV). As a result a capacity of a memory which is required to store a representation of
30 the image is reduced by two samples for each pixel pair. This represents a reduction of 33%.

Effectively the colour processor is arranged to compress the colour image by discarding colour information. Therefore, as with conventional colour YUV 4:4:4 to 4:2:2, the compression process is lossy. However, unlike conventional processing a colour processor embodying the invention forms two chrominance values UV for each pair of pixels by calculating the corresponding chrominance values for the first pixel U1V1, and calculating the chrominance values for the second pixel U2V2. The two output chrominance values UV are then formed by averaging the two corresponding values U1V1, U2V2 to produce a common value UV for the pixel pair. Forming the two-chrominance values UV for a pair of pixels provides a reduction in the number of samples required to represent the image. Furthermore, the reduction is produced in a way which provides a facility for improving the likelihood of maintaining text and other detail which may be present in the image, which may be lost if the chrominance values for the second pixel are simply discarded as with conventional processing.

According to an aspect of the present invention there is provided an image processing apparatus operable to reproduce pixels representative of a colour image from groups of colour component signal samples representing the image. Each of the groups represents two of the pixels and comprises two input luminance values, one for each pixel, and first and second input chrominance values formed by averaging first and second chrominance values for each pixel. The apparatus comprises a de-compressing processor operable to receive the groups of colour component signal samples and to generate output pixels each comprising three colour component values. The apparatus also comprises a detail detection processor operable to detect whether one of the first and second pixels is representative of substantially white or substantially black and the other of the pixels is not representative of substantially white or substantially black. If so, the de-compressing processor is arranged to assign to first and second chrominance values for one of the first and second pixels representing substantially white or substantially black the value of zero, to assign to first and second chrominance values for the other of the first and second pixels, not representing substantially white or black, the value of twice the first and second input chrominance values respectively. The de-compressing processor then reproduces the three colour components of each pixel from the corresponding input luminance value of each pixel and the assigned first and second chrominance values. Otherwise, the

de-compressing processor is operable to reproduce the three colour components of each output pixel from the corresponding input luminance value in combination with the first and second input chrominance values.

5 Forming a compressed representation of the colour image by averaging the two-chrominance values for a pair of pixels provides an advantage when recovering the original image, particularly for example where the image contains text and/or detail. Embodiments of the present invention provide an image processing apparatus including a de-compressing processor and a detail detection processor. The detail

10 detection processor determines whether one of the two pixels represented by each group is representative of substantially white or substantially black and the other pixel is representative of not being substantially white or substantially black. Detecting white or black in only one of the pixels is likely to correspond to the pixel pair representing part of a text character or detail. Accordingly, in order to increase the likelihood of preserving the text and detail in the reproduced image, once black or
15 white has been detected in one of the two pixels, the de-compressing processor is arranged to assign chrominance values (U1, V1) for one of the pixels, representing white or black to zero. The chrominance values (U2, V2) for the other pixel not representing white or black is assigned the value of twice the value of the first and second input chrominance values respectively. Assigning these values to the
20 chrominance samples of the pixels to be reproduced has an effect that the RGB components of the reproduced pixels are more likely to reflect the pixel values of the original image, even though the compression process was lossy. As a result the text information or detail information is preserved in the reproduced image. In contrast, conventional compression techniques, which discard the chrominance values of the
25 second pixel in the pair, are less likely to recover such text information, resulting in a likelihood of the text information being corrupted.

Various further aspects and features of the present invention are defined in the appended claims.

Brief Description of Drawings

Embodiments of the present invention will now be described by way of example only with reference to the accompanying drawings, where like parts are provided with corresponding reference numerals, and in which:

5 Figure 1 is a schematic block diagram of an LCD display module;

Figure 2 is a schematic block diagram of an LCD display module including a colour compressing processor and an image processor according to an embodiment of the invention;

10 Figure 3A is a representation of an example colour image, including text information; Figure 3B is a representation of the example colour image of Figure 3A after compression using a conventional 4:2:2 compression processing;

Figure 4 is a schematic block diagram of a luminance generating circuit forming part of the colour compressing processor shown in Figure 2;

15 Figure 5 is a schematic block diagram of a chrominance generating circuit forming part of the colour compressing processor shown in Figure 2;

Figure 6 is a schematic block diagram of the image processor shown in Figure 2; and

20 Figure 7A is a representation of the colour image of Figure 3A after compression processing; Figure 7B is a representation of the example colour image of Figure 3A after de-compression by the image processor shown in Figure 6.

Description of Preferred Embodiments

An embodiment of the present invention will now be described with reference to an LCD display module. Figure 1 provides an illustration of a typical LCD display module such as that which would be used within a mobile radiotelephone or a personal digital assistant. Generally, there is an increasing demand to display digital images using hand held devices such as mobile radiotelephones. In particular, third generation (3G) mobile radio telecommunications systems will provide a facility for communicating colour images and so mobile radiotelephones for 3G systems will require a facility for displaying such digital colour images.

A typical display module for displaying colour images includes an LCD display panel 1 as shown in Figure 1. Such a display module comprises a display memory 2 which is arranged to store pixel information representative of a digital image which is to be displayed on the LCD display panel 1. Pixels which are representative of the colour image to be displayed are received on a connecting channel 4 and written into the display memory 2 using write address logic 8. When the image is to be displayed, the signal samples, stored in the memory 2, are read by read address logic 10 and converted into the analogue domain by a digital to analogue converter 12 before being displayed on the LCD panel 1.

As already explained, the present invention provides a facility for reducing an amount of data storage capacity which is required to store the digital colour image, whilst maintaining the quality of the image to be displayed on, for example, the LCD panel 2. As will be explained, the present invention provides a particular advantage when the image contains fine detail or fine text information, for example, where part of a text character is only one pixel wide.

An embodiment of the present invention is illustrated in Figure 2. Figure 2 shows the LCD display module of Figure 1 in combination with a colour compressing processor 20 and an image processor 30. In order to reduce the storage capacity of the display memory 2, the colour compressing processor 20 is arranged to receive the pixels representative of the colour image and to reduce the number of samples which are used to represent the image by processing the pixels of the image.

Correspondingly, when the signal samples representing the image are read from the display memory 2, then the image processor 30 is arranged to decompress the signal samples to recover the pixels of the image so that the image can be displayed on the LCD panel 1. For the present example, it is assumed that the pixels of the image received on the connecting channel 4 are represented as 6 bit samples for each of the colour components RGB, although it will be appreciated that other numbers of bits per sample may be used.

As already explained, a particular problem with conventional RGB to YUV colour compression processing, such as that referred to as 4:2:2, is that where text or detail exists in the image, the clarity of this text may be reduced. Such detail may be blurred as a result of colour components being discarded in order to form the compressed image. A result of compressing an example colour image using conventional 4:2:2 processing is illustrated in Figure 3(a) and Figure 3(b). Figure 3(a) provides an example image including text information. As illustrated in Figure 3(b), a result of using conventional 4:2:2 compression encoding in which the chrominance values UV are discarded for every other pixel, is that the fine text information is either blurred or the colour is lost or corrupted producing an unsatisfactory reproduced image.

Embodiments of the present invention therefore seek to compress the digital image whilst preserving such fine text information in the recovered image. To this end, the colour compressing processor 20 is arranged to form U and V values for a pair of pixels by averaging the corresponding U and V chrominance values for each pixel pair. As shown in Figure 2, the colour compressing processor comprises a luminance forming circuit 24 and a chrominance forming circuit 28. An embodiment of the colour compressing processor 20 is shown in Figures 4 and 5.

Figure 4 provides a functional block diagram of the luminance forming circuit 24 which forms the luminance value Y from the RGB values of each pixel. The calculation performed by circuit in Figure 4 is expressed in the equation below:

- 1) $Y = (77R + 150G + 29B)/128$
- 2) $Y = (Y + 1)/2$

Forming the luminance value Y for each pixel using the functional block diagram illustrated in Figure 4, generates a luminance value which maps the 6 bit

values of the RGB components onto a 6 bit luminance value in the range between -32 and +31.

Figure 5 provides an illustration of a functional block diagram of the chrominance forming circuit 28. The calculation performed by the chrominance forming circuit 28 is illustrated by the equations below:

$$1) \quad U = (131B - (44R + 87G))/128$$

$$V = (131R - (110G + 21B))/128$$

$$2) \quad U = (U + 1)/2$$

$$V = (V + 1)/2$$

In Figure 5 the values given in brackets are those which are used for forming the second chrominance value V. As with the luminance forming circuit 24, the chrominance forming circuit 28 has an advantage in providing a 6 bit value for the U and V components generated from the 6 bit input RGB components, which produces values in the range -32 to +31.

As illustrated in Figure 5, the chrominance forming circuit 28 is arranged to generate two chrominance values UV for two input pixels, that is, two input pixels each having RGB values. More particularly, the two chrominance values UV are formed by averaging the corresponding chrominance values U1, V1 and U2, V2 which are formed for each pixel. Thus, unlike conventional compression processing the second two chrominance values U2, V2 are not discarded but combined to form a common chrominance values for the two input pixels.

Returning to Figure 2, the write address logic 8 is arranged to store the component signal samples representative of the image in the display memory 2. Four samples are stored to represent two pixels otherwise requiring six samples, thereby providing a 33% saving in the memory capacity for this example. The samples are stored in the display memory 2 as Y1U and Y2V.

Compressing the pixels by forming common chrominance values UV for each pair of pixels provides a particular advantage in overcoming the technical problem illustrated in Figures 3(a) and 3(b) in which text information can be corrupted. This advantage will be understood following explanation of the operation of the de-compression process provided by the image processor 30.

As shown in Figure 2, the image processor 30 comprises a detail detection processor 34 and a YUV to RGB de-compression processor 38. YUV compressed samples are received by the detail detection processor 34 and the YUV to RGB de-compression processor 38 from the read address logic 10. The detail detection processor is arranged to control the YUV to RGB de-compression processor 38 in order to recover the RGB values in a way, which preserves the text information. The image processor 30 is shown in more detail in Figure 6.

As illustrated in Figure 6, the detail detection processor comprises for each luminance value a pair of comparators 40, 42, 44, 46. Each of the comparators compares one of the luminance values with a threshold value representing white and a threshold value representing black. The comparators 40, 42, 44, 46 therefore determine whether either of the luminance values Y1, Y2 are representative of white or black.

As will be appreciated, the threshold values provided to the comparators 40, 42, 44, 46 are selected effectively to identify that one of the two pixels is representative of white or almost white or black or almost black. Detection is determined if either luminance value exceeds the white threshold or is lower than the black threshold. The presence of white or black in one pixel but not the other reflects a change in the image from one pixel to another of the pixel pair, which is likely to represent the presence of detail or text information in the image.

Control signals representative of a result of the comparisons performed by the comparators 40, 42, 44, 46 are fed to the YUV to RGB de-compression processor 38. The control signals are received at selection logic gates 50, 52, 54, 56. Consequent upon the output from the comparators received on the connection channels 36.1, 36.2, 36.3, 36.4, the selection gates 50, 52, 54, 56 select either the value of zero, twice the value of the input chrominance values U or V, or the input chrominance value U or V. Correspondingly therefore, the selection gates, 50, 52, 54, 56 produce at each respective output, reproduced chrominance values U1, V1, U2, V2.

Also forming part of the de-compression processor 38 are multiplying circuits 60, 62. The multiplying circuits are arranged to produce twice the value of the corresponding input chrominance values U, V and the input chrominance values U, V which are fed to the selection gates 50, 52, 54, 56.

Having reproduced the chrominance values for each pixel U_1 , V_1 and U_2 , V_2 , a YUV to RGB conversion processor 70 is arranged to convert the YUV component values for the first pixel Y_1 , U_1 , V_1 and the second pixel Y_2 , U_2 , V_2 into the RGB values of the reproduced pixel pair. Therefore for each group of component signal samples $Y_1U_1Y_2V_2$ a pixel pair is formed, which is represented as $R_1G_1B_1$, $R_2G_2B_2$. As shown in Figure 2, the RGB values are then fed to the digital to analogue converter 12 for display on the LCD panel 2.

According to the operation of the detail detection processor 34, in combination with the de-compressing processor 38, a functional arrangement is formed for the regeneration of the YUV values for each pair of pixels. The functional arrangement is represented by the following algorithm:

1) Pixel 1 (Y_1) represents white or black and pixel 2 (Y_2) represents not white or black then:

$$Y_1 = Y_1, U_1 = 0, V_1 = 0$$

$$Y_2 = Y_2, U_2 = U_{x2}, V_2 = V_{x2}$$

2) Pixel 1 (Y_1) represents not white or black and pixel 2 (Y_2) represents white or black:

$$Y_1 = Y_1, U_1 = U_{x2}, V_1 = V_{x2}$$

$$Y_2 = Y_2, U_2 = 0, V_2 = 0$$

3) For all other pixels:

$$Y_1 = Y_1, U_1 = U, V_1 = V$$

$$Y_2 = Y_2, U_2 = U, V_2 = V$$

The colour compressing processor 20 and image processor 30 operate in combination to compress the amount of data required to represent an image whilst preserving text information. For the image illustrated in Figure 3(a), a result of processing by the colour compressing processor 20 and the image processor 30 is illustrated in Figures 7(a) and 7(b). Figure 7(a) illustrates the text of the image in Figure 3(a) which results when the colour compressing processor has processed the pixels of the image in a way which reduces the chrominance components. As illustrated, there is substantial blurring in this image resulting from the averaging performed by the colour compressing processor in order to form the two chrominance values. However, as shown in Figure 7(b), a result of de-compressing the compressed

colour image as performed by the image processor 30, according to an embodiment of the invention, is to recover the original image with the effect of retaining the text detail.

As will be appreciated by those skilled in the art, various modifications may be made to the embodiments herein before described without departing from the scope of the present invention. In particular, it will be appreciated that the colour compressing processor and the image processor may be used in combination with any type of display. The invention is therefore not limited to applications with an LCD display. Embodiments of the present invention find particular application where there is a requirement to reduce memory size or components of a product requiring a facility for displaying colour images. It will be appreciated that the invention finds application with colour depth values other than 18-bits such as 24-bits. For larger colour depth values such as 24-bits, the reduction in memory size will be even greater in accordance with the size of the colour component signal samples.

CLAIMS

1. An image processing apparatus operable to reproduce pixels representative of a colour image from groups of colour component signal samples representing the image, each of said groups representing two of said pixels and comprising two input luminance values, one for each pixel, and first and second input chrominance values formed by averaging first and second chrominance values for each pixel, said apparatus comprising

a de-compressing processor operable to receive said groups of colour component signal samples and to generate reproduced pixels, each comprising three colour component values, and

a detail detection processor operable to detect whether one of said first and second pixels is representative of substantially white or substantially black and the other of said pixels is not representative of substantially white or substantially black, and if so, arranging for said de-compressing processor

to assign to first and second chrominance values for one of said first and second pixels representing substantially white or black the value of zero,

to assign to first and second chrominance values for the other of said first and second pixels, not representing substantially white or black, twice the value of the first and second input chrominance values respectively, and

to reproduce the three colour components of each pixel from the corresponding input luminance value and the assigned first and second chrominance values, and otherwise

to reproduce the three colour components of each pixel from the corresponding input luminance value in combination with the first and second input chrominance values.

2. An image processing apparatus as claimed in Claim 1, wherein said detail detection processor is operable to compare first and second input luminance values of each group with white and black threshold values, each representative of substantially white and substantially black luminance values respectively and to determine whether one of said pixels is representative of substantially white or

substantially black and the other of said pixels is not representative of substantially white or substantially black, in accordance with the result of the comparison.

3. An image processing apparatus as claimed in Claim 2, wherein the
5 comparison performed by said detail detection processor comprises

determining whether said first input luminance value exceeds said white threshold value or said first input luminance value is less than said black threshold value, and determining whether said second input luminance value exceeds said white threshold value or said second input luminance value is less than said black threshold
10 value.

4. A colour processor operable to process input pixels, each comprising three colour component signal samples, to produce output colour component signal
15 samples, said colour processor being operable to receive first and second input pixels and to generate from each said pixel a corresponding luminance value from the corresponding three colour component samples of each pixel respectively, and

to form first and second output chrominance values from said first and second input pixels by calculating from each of the colour components of each pixel first and
20 second chrominance values, and averaging the values of the first chrominance values for the first and second input pixels and averaging the second chrominance values for the first and second pixels, to produce said first and second output chrominance values respectively, said output colour component signal samples being formed for said first and second pixels from said corresponding luminance value for each pixel and said
25 first and second output chrominance values.

5. A display device comprising a display, a display memory, a colour processor as claimed in Claim 4 and an image processing apparatus as claimed in Claim 1, 2 or 3, wherein input pixels representative of a colour image are fed to said
30 colour processor and groups of signal samples representing said pixels produced by said colour processor are stored in said display memory, and said groups of signal samples are read out from said display memory and processed by said image

processing apparatus to generate reproduced pixels before being displayed by said display device.

6. A display device as claimed in Claim 5, wherein said display is a
5 Liquid Crystal Display (LCD).

7. A display device as claimed in Claim 5 or 6, wherein reproduced pixels
~~generated by said image processing apparatus are converted to analogue form by an~~
analogue-to-digital converter for display on said LCD display.

10

8. A portable computing or communicating device having a display device
according to Claim 5, 6 or 7.

9. A mobile radiotelephone having a display device as claimed in Claim
15 5, 6 or 7.

10. A signal representative of the pixels of an image as processed by the
image processing apparatus according to Claim 1, 2 or 3, or the colour processor as
claimed in Claim 4.

20

11. A data carrier bearing the signal as claimed in Claim 10.

12. A method of processing a colour image to reproduce pixels
representative of the colour image from groups of colour component signal samples
25 representing the image, each of said groups representing two of said pixels and
comprising two input luminance values, one for each pixel, and first and second input
chrominance values formed by averaging first and second chrominance values for
each pixel, said method comprising

receiving one of said groups of signal samples representative of first and
30 second pixels,

detecting whether one of said first and second pixels is representative of substantially white or substantially black and the other of said pixels is not representative of substantially white or substantially black, and if so

5 reproducing to first and second chrominance values for one of said first and second pixels representing substantially white or black the value of zero, and

reproducing to first and second chrominance values for the other of said first and second pixels the value of twice the value of the first and second input chrominance values respectively, and

10 generating three colour components for each of said first and second reproduced pixels from the input luminance values and the assigned chrominance values, and otherwise

generating three colour components of each of said first and second reproduced pixels from the corresponding input luminance value in combination with the first and second input chrominance values.

15

13. A method of processing input pixels representative of a colour image, each pixel comprising three colour component signal samples, to produce output colour component signal samples, said method comprising

20 receiving first and second input pixels and generating from each pixel a corresponding luminance value from the three colour component samples of the pixel, and

forming first and second output chrominance values for said first and second pixels by

25 calculating from each of the colour components of each pixel first and second chrominance values, and

30 averaging the value of the first chrominance values of the first and second pixels and averaging the second chrominance values of the first and second pixels, to produce said first and second output chrominance values respectively, said output colour component signal samples being formed for said first and second input pixels from said corresponding luminance values for each pixel and said first and second output chrominance values.

14. An image processing apparatus and a colour processor as herein before described with reference to the accompanying drawings.

15. A method of processing an image or a method of processing input
5 pixels representative of a colour image as herein before described with reference to the accompanying drawings.

ABSTRACTIMAGE PROCESSING APPARATUS AND METHOD

A compression and de-compression arrangement is provided for a display device having a display memory and a display. The arrangement includes a colour processor which reduces the colour samples by processing a pair of pixels to produce first and second luminance values and forming first and second output chrominance values from the pair of pixels. The first and second output chrominance values are formed by calculating for each pixel the corresponding U and V chrominance values and forming the first and second chrominance values (U, V) from the average of the values for each pixel.

Forming the compressed representation of the colour image provides an advantage when recovering the original image, particularly for example where the image contains detail and/or text. The image processing apparatus of the system receives the group of colour component signal samples from the display memory and generates first and second output pixels, each comprising three colour component values (R, G, B), from each group. The image processing apparatus includes a detail detection processor, which detects whether either of the pixels represented by each group of signal samples represents white or black and the other does not. This may be representative of one of the pixels being part of a text character or detail. Accordingly, in order to improve the likelihood of preserving the text and detail in the reproduced image, the de-compressing processor is arranged to assign the chrominance values (U1, V1) of one of the pixels to zero. The other chrominance value (U2, V2) of the other pixel is assigned the value of twice the value of the first and second input chrominance values respectively.

[Fig 2]

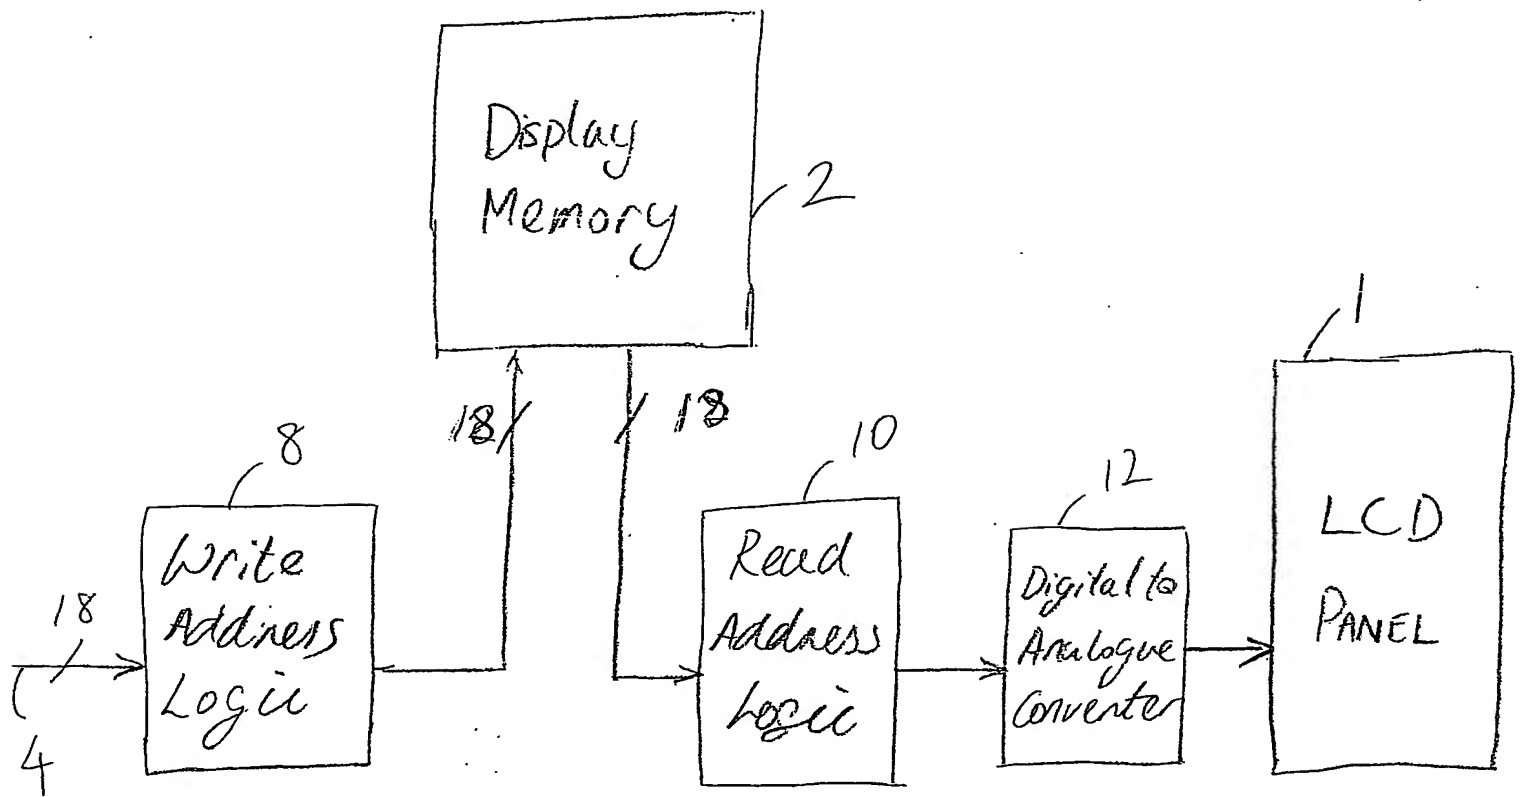


Fig. 1

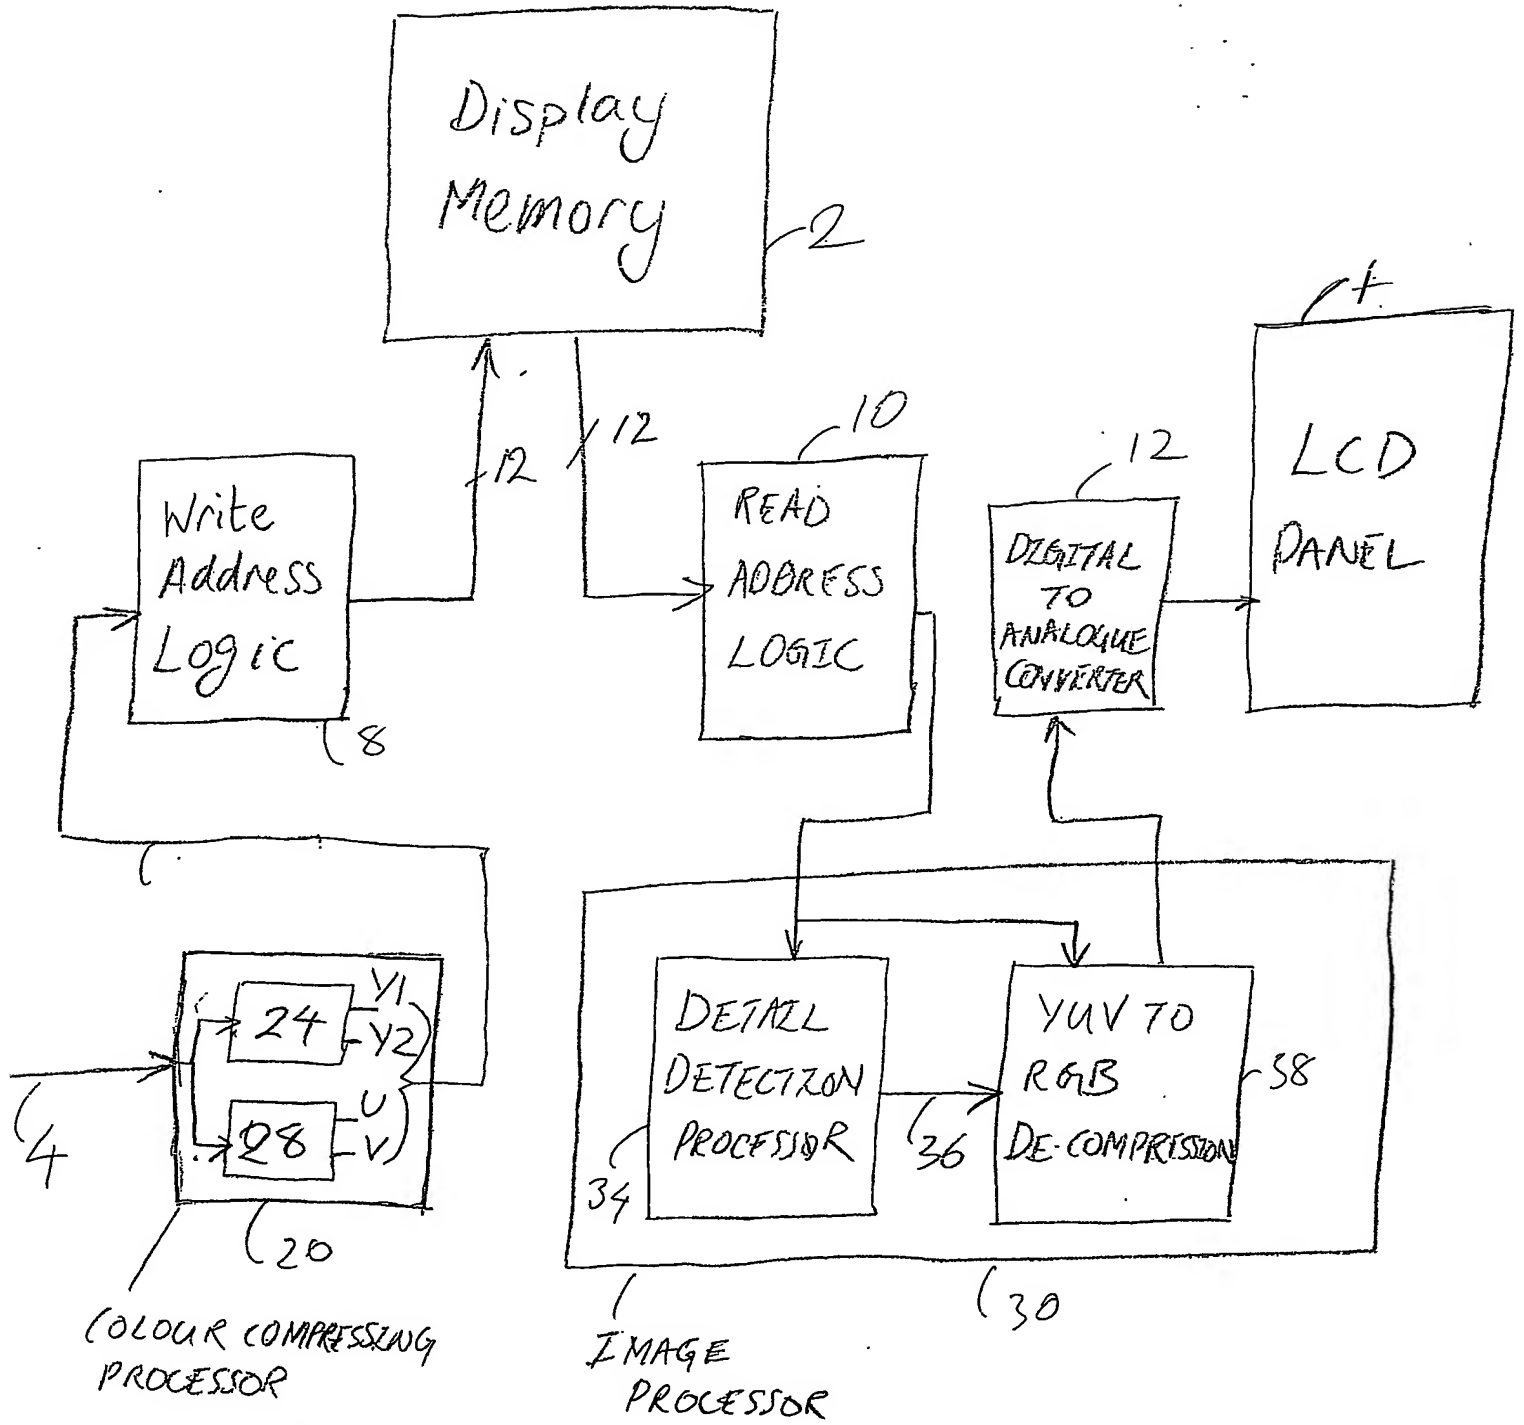


Fig. 2

152 GB
3/5

Text in 16 font
Text in 16 font
Text in 16 font
Text in 16 font
Text in 12 font
Text in 12 font
Text in 12 font
Text in 12 font

Fig 3(a)

Text in 16 font
Text in 16 font
Text in 16 font
Text in 16 font
Text in 12 font
Text in 12 font
Text in 12 font
Text in 12 font

Fig 3(b)

Text in 16 font
Text in 16 font
Text in 16 font
Text in 16 font
Text in 12 font
Text in 12 font
Text in 12 font
Text in 12 font

Fig 7(a)

Text in 16 font
Text in 16 font
Text in 16 font
Text in 16 font
Text in 12 font
Text in 12 font
Text in 12 font
Text in 12 font

Fig 7(b)

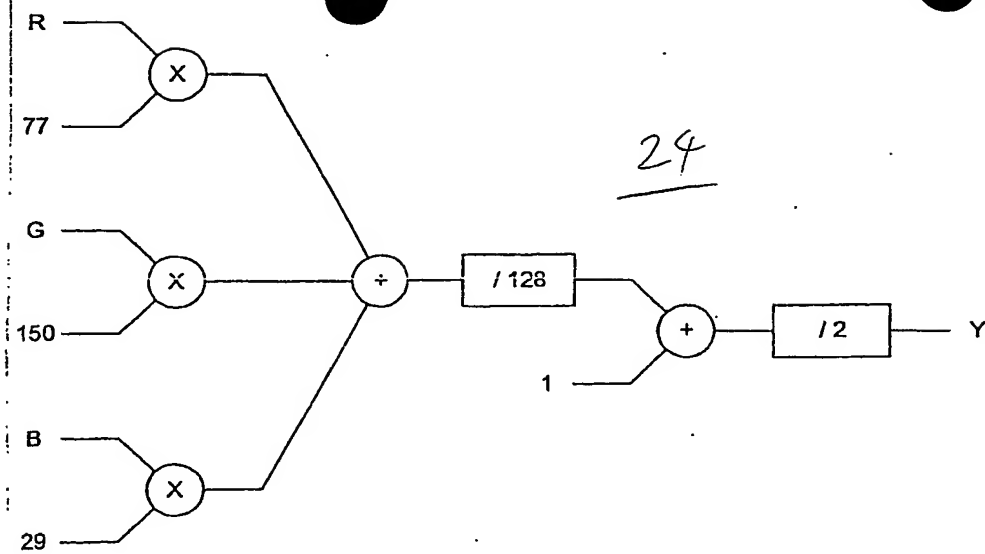


Fig. 4

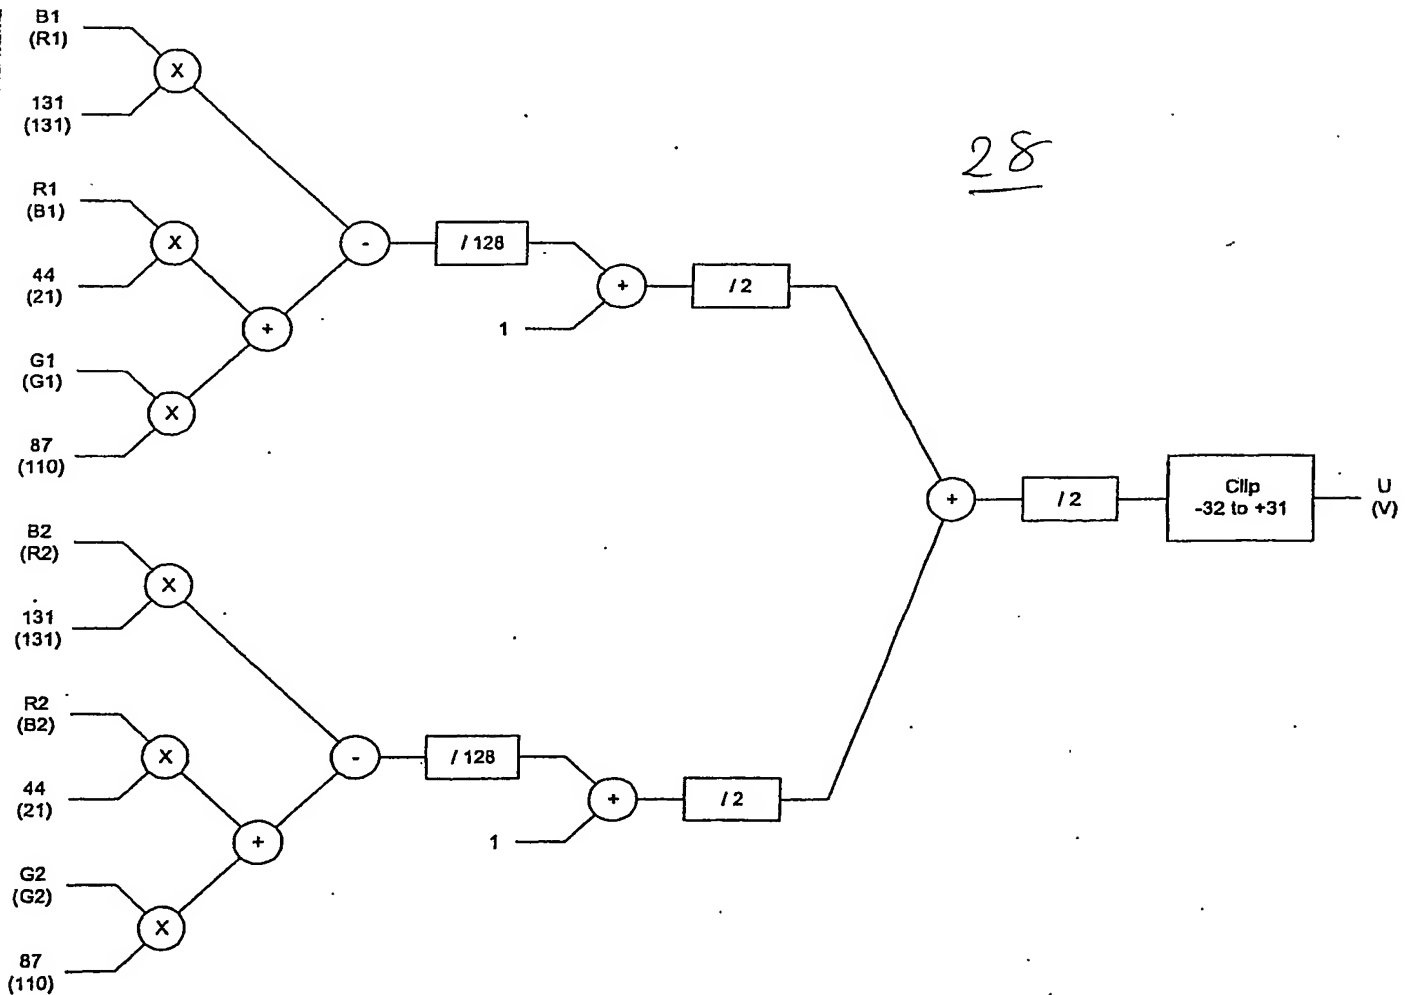


Fig. 5

024B

5/5

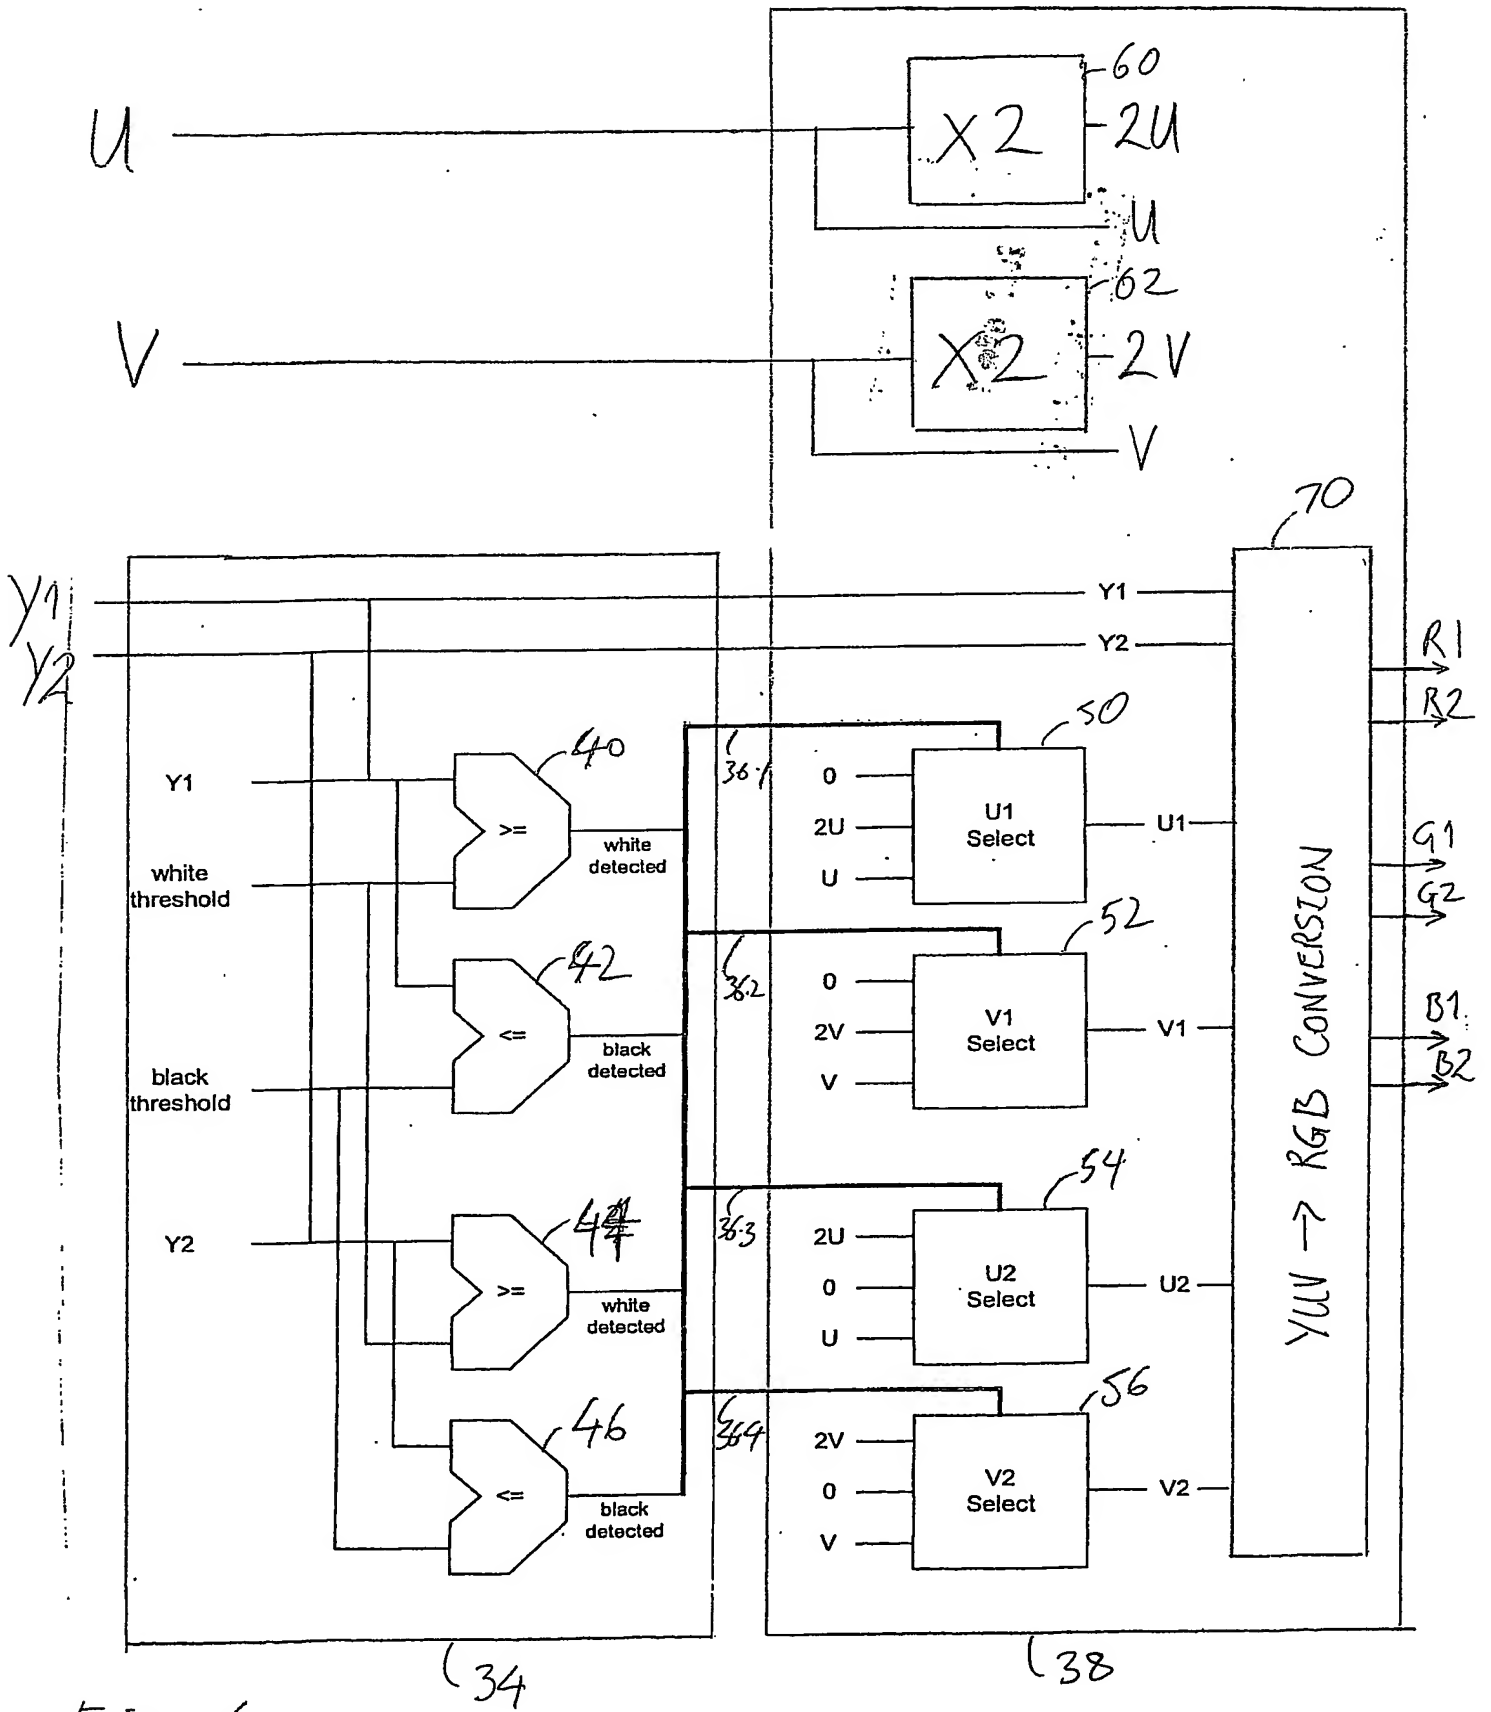


Fig. 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.